

SG-PTZ2068NO-L1K

- 2MP 68x Long Range Zoom Starlight Laser Network Vehicle PTZ Camera



1. Features

- > 1/1.8" Sony Exmor CMOS Sensor.
- > Powerful 68x optical zoom (6~408mm).
- > Max. 2MP(1920×1080) Resolution.
- > Support Optical Defog.
- > Support various IVS functions.
- > Support various OSD information overlay.
- > Up to 1000m Laser IR Distance.
- > Military Connector.
- > IP67.



2. Specification

Model		SG-PTZ2068NO-L1K			
Sensor	Image Sensor	1/1.8" Sony Starvis progressive scan CMOS			
	Effective Pixels	Approx. 4.17 Megapixel			
Lens	Focal Length	6mm~408mm, 68x Optical Zoom			
	Aperture	F1.4~F4.6			
	Field of View	H: 66.0°~1.0°, V: 40.3°~0.6°, D:73.4°~1.2°			
	Close Focus Distance	1m~5m (Wide~Tele)			
	Zoom Speed	Approx. 8s (Optical Wide~Tele)			
	DORI Distance (Human)	Detect	Observe	Recognize	Identify
Video	Compression	4,400m	1,746m	880m	440m
		H.265/H.264/H.264H/MJPEG			
	Streaming Capability	3 streams			

	Resolution	50Hz: 25fps@2MP(1920×1080), 25fps@1MP(1280×720) 60Hz: 30fps@2MP(1920×1080), 30fps@1MP(1280×720)
	Video Bit Rate	32kbps~16Mbps
	Audio	AAC / MP2L2
Network	Network Protocol	IPv4, IPv6, HTTP, HTTPS, TCP, UDP, RTSP, RTCP, RTP, ARP, NTP, FTP, DHCP, PPPoE, DNS, DDNS, UPnP, IGMP, ICMP, SNMP, SMTP, QoS, 802.1x, Bonjour
	API	ONVIF, HTTP API, SDK
	Web Browser	IE, Edge, Firefox, Chrome
	User	Up to 20 users, 2 level: Administrator, User
	Storage	Micro SD/SDHC/SDXC card (Up to 1TB) edge storage, FTP, NAS
	Multicast	Support
General Events		Motion, Tamper, SD Card, Network
IVS		Tripwire, Cross Fence Detection, Intrusion, Abandoned Object, Fast-Moving, Parking Detection, Crowd Gathering Estimation, Missing Object, Loitering Detection.
S/N Ratio		≥55dB (AGC Off, Weight ON)
Minimum Illumination		Color: 0.005Lux/F1.4; B/W: 0.0005Lux/F1.4
Noise Reduction		2D/3D
Exposure Mode		Auto, Aperture Priority, Shutter Priority, Gain Priority, Manual
Exposure Compensation		Support
Shutter Speed		1/1~1/30000s
BLC		Support
HLC		Support
WDR		Support
White Balance		Auto, Manual, Indoor, Outdoor, ATW, Sodium lamp, Street lamp, Natural, One Push
Day/Night		Electrical, ICR(Auto/Manual)
Focus Mode		Auto, Manual, Semi Auto, Fast Auto, Fast Semi Auto, One Push AF
Electronic Defog		Support
Optical Defog		Support, 750nm~1100nm channel is Optical Defog
Heat Haze Reduction		Support
Flip		Support
EIS		Support
Digital Zoom		16x
IR Distance		Up to 1000m
IR On/OFF Control		Auto/Manual
IR LEDs		Laser Module
Wiper		N/A
PTZ	Material	Integrative structure design, Aluminum-Alloy shell
	Driving Mode	Turbine Worm Drive
	Power-Off Protection	Support

	Pan/Tilt Range	Pan: 360°, Endless; Tilt: -84°~84°
	Pan/Tilt Speed	Adjustable, pan: 0°~60°/s; Tilt: 0°~40°/s;
	Tour	4
	Presets	128
	Protocol	Pelco-P/D
	Military Connector	Support
Ethernet		RJ-45 (10Base-T/100Base-TX)
RS485		1
Audio I/O		1/1
Alarm I/O		1/1
Cable		5m by default (with 2m Circle Protection part)
Power Supply		DC24~36V±15% / AC24V
Power Consumption		50W
Operating Conditions		-30°C~+60°C/20% to 80%RH
Protection Level		IP67; TVS 4000V Lightning Protection, surge prevention
Casing		Metal
Color		White by default (Black Optional)
Dimensions(L*W*H)		Approx. 260mm*387mm*265mm
Net Weight		8.8kg
Gross Weight		16.7kg

3. Dimension

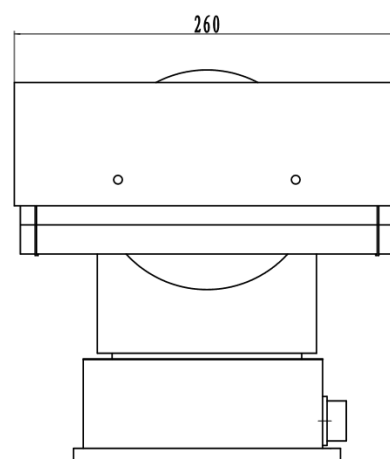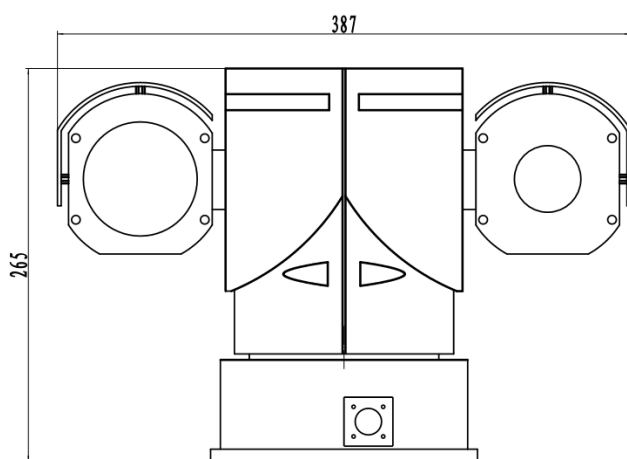

Hangzhou Savgood Technology Co., Ltd.

Rm. 1201, Xingcheng Fazhan Building #1, No. 406 Xintiandi Street,
Gongshu District, Hangzhou City, 310022, China
Tel: +86 - (571) 8803 8121
Email: sales@savgood.com
<http://www.savgood.com>
<http://www.savgoodtech.com>

*Design and specifications are subject to change without prior notification.
© 2013 Savgood Technology Co., Ltd.